
RETRACTABLE PADEL COURT CANOPY / MODEL DATASHEET

Integrated Retractable Padel Canopy

A motorized opening-roof arrangement with a compact footprint. Coordinate the moving roof, electrical provision, controls and maintenance access from the design stage.

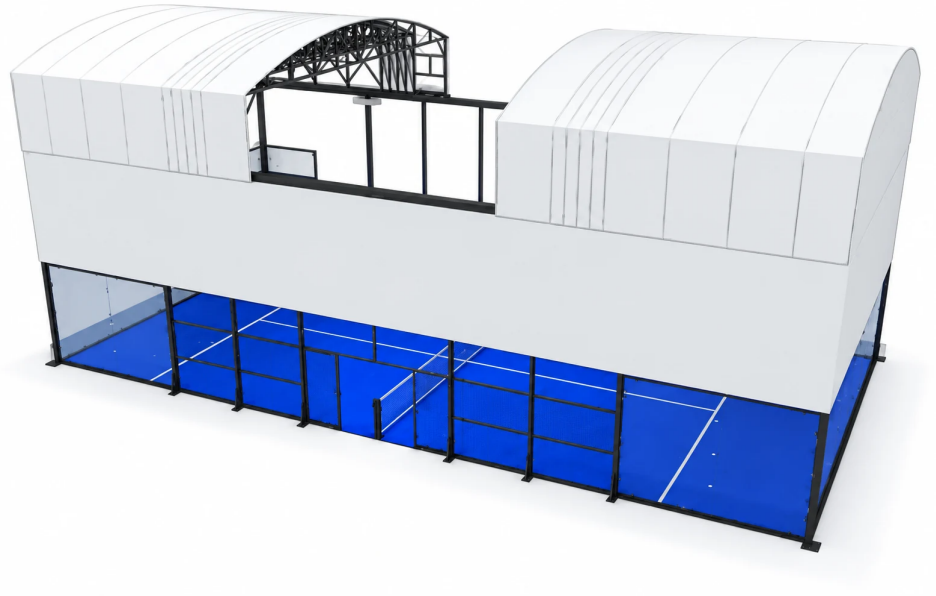

Product design visualization. Colours and geometry follow the selected equipment schedule.

Overall dimensions L × W × H	20.6 × 10.6 × 8.8 m
Column section	100 × 100 × 3 mm
Column height	6 m

Configuration focus

Compact motorized roof configuration

Technical specification

Model-specific values from the factory product schedule. Keep the selected members, materials and connections together as one configuration.

Structure & geometry

Overall dimensions L × W × H	20.6 × 10.6 × 8.8 m
Column section	100 × 100 × 3 mm
Column height	6 m
Arch rise	2.8 m
Operation	Motorized opening / closing with controls selected for the venue

Membrane & site interfaces

Covering	PVDF membrane with material-specific technical documentation
Playing clearance	Playing clearance measured below the lowest roof member, light or service
Site design	Project-specific support foundations, loading and drainage

Include in your equipment brief

- Measured court and canopy layout with support positions
- Local loading requirements and foundation interfaces
- Membrane product, seams, perimeter connections and drainage
- Lighting and electrical coordination, access and maintenance scope
- Power supply, control mode, movement limits and operating handover

Your selected configuration is supplied with coordinated drawings, quantities and an itemized equipment schedule.

Drawings coordinate actual quantities, site supports, local loading, drainage and electrical interfaces. Our factory provides installation guidance, replacement-part identification and a five-year product quality warranty under the published terms.