
PANORAMIC PADEL COURT / MODEL DATASHEET

# Panoramic QF Padel Court

A panoramic arrangement with a 100 mm square corner post and a 100 × 50 mm upper beam. Compare the frame silhouette, connection drawing and viewing lines together.

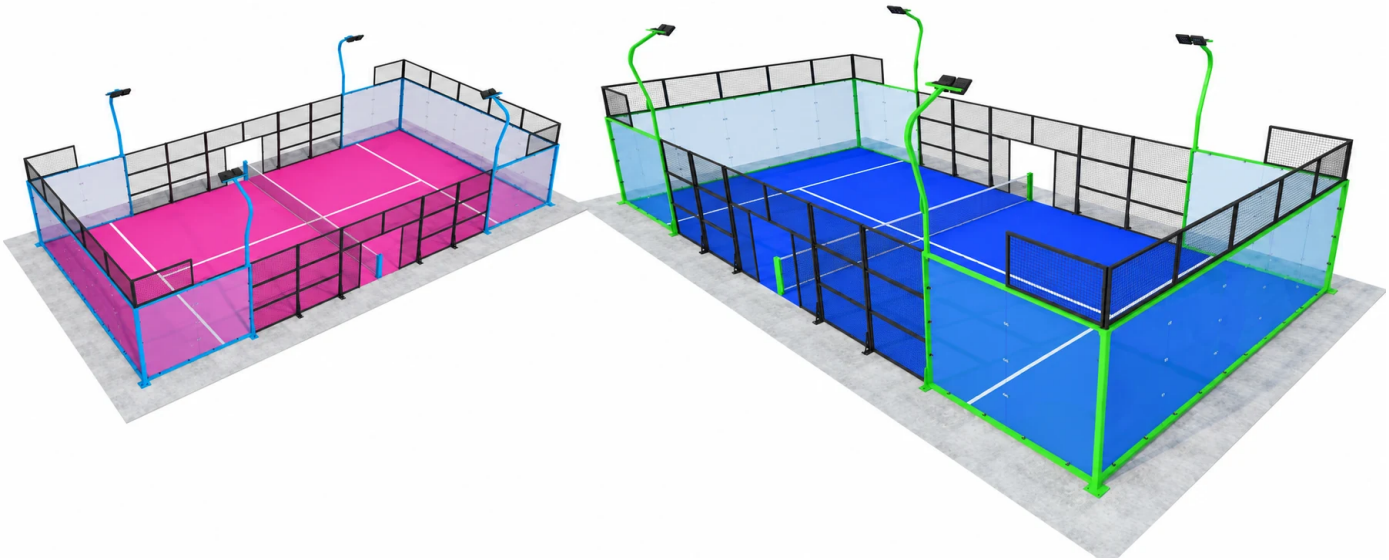

Product design visualization. Colours and geometry follow the selected equipment schedule.

| | |
|---|---|
| **Internal playing area** | 20 × 10 m / 200 m² |
| **Corner posts** | 100 × 100 × 3 mm; height 3 m |
| **Upper crossbeam** | 100 × 50 × 3 mm; length 3 m |

## Configuration focus

100 × 50 × 3 mm upper crossbeam

# Technical specification

Model-specific values from the factory product schedule. Keep the selected members, materials and connections together as one configuration.

## Structure & geometry

| | |
|---|---|
| **Internal playing area** | 20 × 10 m / 200 m² |
| **Corner posts** | 100 × 100 × 3 mm; height 3 m |
| **Upper crossbeam** | 100 × 50 × 3 mm; length 3 m |
| **Lower crossbeam** | 100 × 50 × 3 mm; length 3 m |
| **Posts** | 100 × 50 × 3 mm; height 3 m |

## Surface, glass & equipment

| | |
|---|---|
| **Glass** | 12 mm tempered glass |
| **Turf supply area** | 210 m² supply area for the 200 m² playing rectangle |
| **Turf pile-height options** | CC: 12 mm; Upgrade: 12 mm; Match: 10 mm |
| **Turf density options** | CC: 52 500 / m²; Upgrade: 63 000 / m²; Match: 46 200 / m² |
| **Turf colours** | Blue / Green / Brick-red |
| **Lighting** | 8 × 200 W LED, IP66 |
| **Padel frame finish** | Seven standard frame colours; other references by quotation |

## Include in your equipment brief

- Court layout, member schedule and connection drawings
- Glass sizes, holes, fixing kit and packing sequence
- Turf product, colour, roll layout, joins and infill scope
- Lighting model, positions, electrical supply and pole arrangement

Your selected configuration is supplied with coordinated drawings, quantities and an itemized equipment schedule.

Drawings coordinate actual quantities, site supports, local loading, drainage and electrical interfaces. Our factory provides installation guidance, replacement-part identification and a five-year product quality warranty under the published terms.